



HA103-800 Hydraulic Security Bollards



IP68



3M Reflective Tape
LED Warning Lights



SUS304

PLC Program
Control Cabinet



Outdoor
Control Cabinet

ZASP HA103-800 automatic bollards are the top line security products of the ZASP range. Current models are the result of our 12 years' experience in the security field for specific design and manufacture of bollards. The HA103-800 bollard is recommended for use in any pedestrian areas, private parkings, business parkings, private driveways, business driveways, commercial driveways.

The HA103-800 is available with a large number of optional accessories that allow you to customize your system according to your security needs.

- ◆ Hydraulic bollards with built-in pump
- ◆ SGS certified rising and descent speed;
- ◆ SGS certified IP68 waterproof and dustproof
- ◆ SGS certified durability test of continuous operating with 5000 loops;
- ◆ SGS certified nominal operating temperature -40°C ~ +70°C, dry heat test, low temperature resistance test;
- ◆ PLC controller linkage work with vehicle identification, inductive loops, CCTV, beam barrier, etc.


Specifications

Product Dimension	Φ470 x H1350 mm
Cylinder Material	304 stainless steel
Cylinder Diameter	271 mm
Cylinder Intercept Height	800 mm
Rising Cylinder Total Height	960 mm
Cylinder Thickness	10 mm
Flange Diameter	470 mm
Flange Thickness	58 mm
Cylinder underground Depth	1350 mm
Cylinder underground Diameter	377 mm
Movement Principle	Hydraulic driving
Cylinder Stainless Steel Finish	Brushed
Reflecting Adhesive Strip	Yes, 3M brand, Optional colors, Customized LOGO
Emergency Lowering if Power Fails	Yes
Safety Reversal Pressure Switch	Optional
LED light	Yes
Type of Use	Intensive
Life Units	10 years

IP Rating	IP68
Rising Time	3.8s
Lifting Force	200KG
Operating Temperature	-40°C ~ +70°C
Heating Unit	Optional
Overheating Protection	+120°C
Oil Tank Capacity	1L
Power Supply	AC380V / AC220V
Power Consumption	300W

Control Cabinet Dimension	400mmL x 200mmW x 500mmH
Finish	Outdoor Spray Paint
Self-Testing Program	Yes
Emergency Lowering	Yes
Remote Control Distance	100 meters
Communication Signal	RS-232, RS-485, Ethernet Optional
Air Leakage Switch	Yes, CHNT brand
Power Supply	AC380V / AC220V
Control Voltage	DC12V, Mean Well brand
PLC Controller Linkage Work	Traffic light, Inductive Detector Loop, and other access control equipment

Dimensions

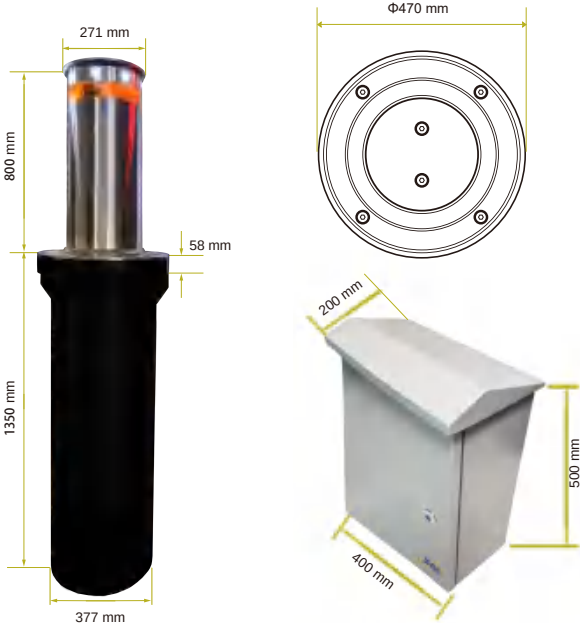

Hydraulic Actuator

Low temperature sensitivity
No fear of any harsh environment



PLC Control Box

Waterproof design
Widely integration usage
Programmable Logic Controller



Related Components



Bollards



Control Box



Remote Control